




CELLOFOAM®  
North America Inc.

# poly shield®

Accordion Folded, Laminated EPS Foam Insulation Board

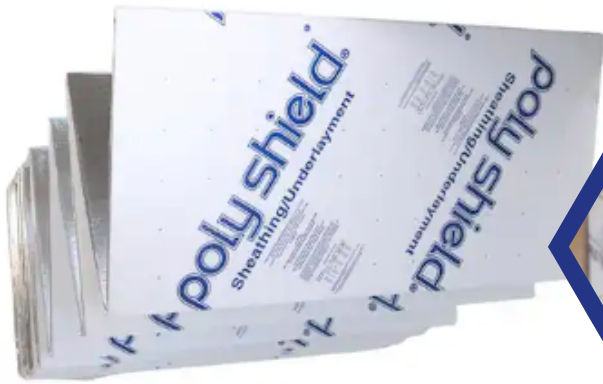

## WHY POLY SHIELD® FAN-FOLD?

- **Accordion Design** = quicker installation than competing 4 x 8 ft insulation or backer boards
- **Reduces application labor costs** for exterior walls or roof
- **Optimal thermal savings** per dollar cost
- **Dimensional stability**
- **Moisture resistant**
- **Faced with tough polymeric laminates** on both sides for added strength and durability in storing, handling, and installation
- **3rd Party Product Approval: UL Evaluation Report - ER7260-01 & Meets ASTM C578 Standards**
- **EPS contains no formaldehyde or ozone depleting CFCs or HCFCs**

## Sizes

- **2 square bundles** of 4 x 50 ft
- **Density (pcf): 1.0, 1.25, and 1.5lb/ft<sup>3</sup>**
- **Thickness of 3/8" & 1/2"**

## APPLICATIONS

- Frequently used on exterior walls as an insulative backer board for siding, but also to insulate interior or basement wall
- As a roofing underlayment/re-cover board. Ideal for low-slope commercial and industrial roofs that employ mechanically attached or ballasted roofing systems.
- May be part of a class A fire-rated roof assembly

## CODE APPROVALS

- **ASTM C578, Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation**
- **Underwriters Laboratory Listed, UL ER7260, for interior and exterior walls**
- **UL Classified TGFU.R7260 for fully adhered ballasted, and mechanically attached roofing assemblies.**

**Source Mountain Supply**

**(920) 382-0382**

**Sales@SourceMountain.com**

